

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523

914-699-0101

sales@mormax.com mormax.com

AC POWER & DATA CONNECTIVITY SOLUTION 3TW-AUU-BZ5AB


M-POWER-3T

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: Custom Finishes Available

ARCHITECTURAL BRONZE (ABS)

s Available M-POWER-3TW-AUU-BZ5AB

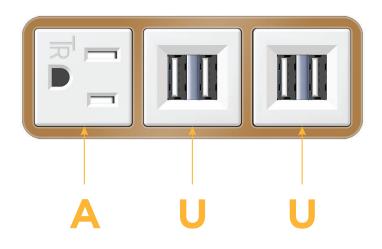

Features:

Ures: Module/Port Options:

- A Tamper Resistant AC Receptacle
- U Double USB (Fast Charging Ports Rated for 3.2A)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug Optional Standard Straight 120 VAC Plug Optional Straight 120 VAC Pass-through Plug Shown in Architectural Bronze (ABS) Bezel, featuring 1 Tamper Resistant AC and 2 Double USB Charging Ports.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.2A HIGH SPEED USB-A CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





Modules/Ports:

Distributed by

MORMAX

Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523

914-699-0101 sales@mormax.com mormax.com

Specs: Tamper Resistant AC Receptacle Α U Double USB (Fast Charging Ports - Rated for 3.2A) TOP 1.381" (35.082mm) X 2.106" (53.503mm) TZ, -fr -A SAR n n n n <u>n.a.a.a</u> μ 5.570" (141.500mm) 6.319" (160.503mm) 3.861" (98.082mm) n n n n Shown with 1 Tamper Resistant AC, and 2 Double USB Charging Ports. Optional Straight 120 VAC Pass-through Plug 0 0.619" 1.233" (31.340mm 1.141″ (15.746mm) 0.984″ 29.00mm) (25.00mm 0.613" (15.594mm ΗH 1.704" (43.300mm) س T. Ø 1.132' (28.766mm 2.515" (63.900mm) 1.381" (35.082mm) 0.234" (5.944mm) 0.118" (3.000mm) 🛉 1.840" (46.744mm) 1.606" (40.800mm) SIDE END

E491161

1.555" (39.503mm)

0.905" (23.000mm)