M-POWER-5T
AC POWER & DATA CONNECTIVITY SOLUTION
5TM2-AUZD-M2STP

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Plate Finish:
Custom Finishes Available

UNICOLOR™ MAGNESIUM (STEEL)
M-POWER-5TM2-AUZD-M2STP

A   U   Z   D
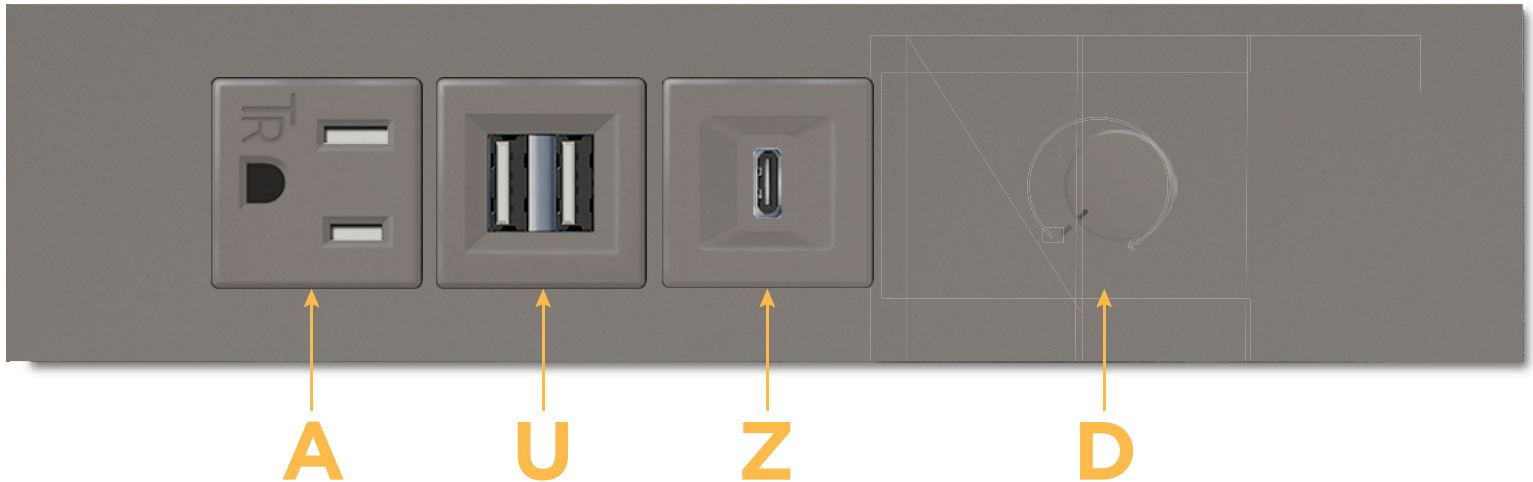
Features:

Module/Port Options:	
A	Tamper Resistant AC Receptacle
B	USB-A & USB-C (3.0A USB-A / 15W USB-C)
U	Double USB-A (Fast Charging Ports - Rated for 3.2A)
D	AC Dimmer
H	HDMI
6	CAT 6
12	RJ 12
X	Switched AC
Y	3-Way Switch
C	USB-C (27W High Speed Charging Port)
Z	USB-C (18W High Speed Charging Port)
R	Switched AC (Rocker Switch)

Plug:	
	Supplied with Low Profile Flat 45° Angle 120 VAC Plug
	Optional Standard Straight 120 VAC Plug
	Optional Straight 120 VAC Pass-through Plug

Shown in Unicolor ™ Magnesium (Steel) Slim Plate, featuring 1 Tamper Resistant AC, 1 Double USB Charging Port, 1 USB-C Charging Port, and 1 AC Dimmer.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.2A HIGH SPEED USB-A CHARGING FOR ALL DEVICES
- 18W USB-C FAST-CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- ETL LISTED (IN COMPLIANCE WITH UL 962A)
- 15A
- 0% TO 100% DIMMING

ETL LISTED
Intertek
5005200

METRO LIGHT & POWER

M-POWER-5T
AC POWER & DATA CONNECTIVITY SOLUTION
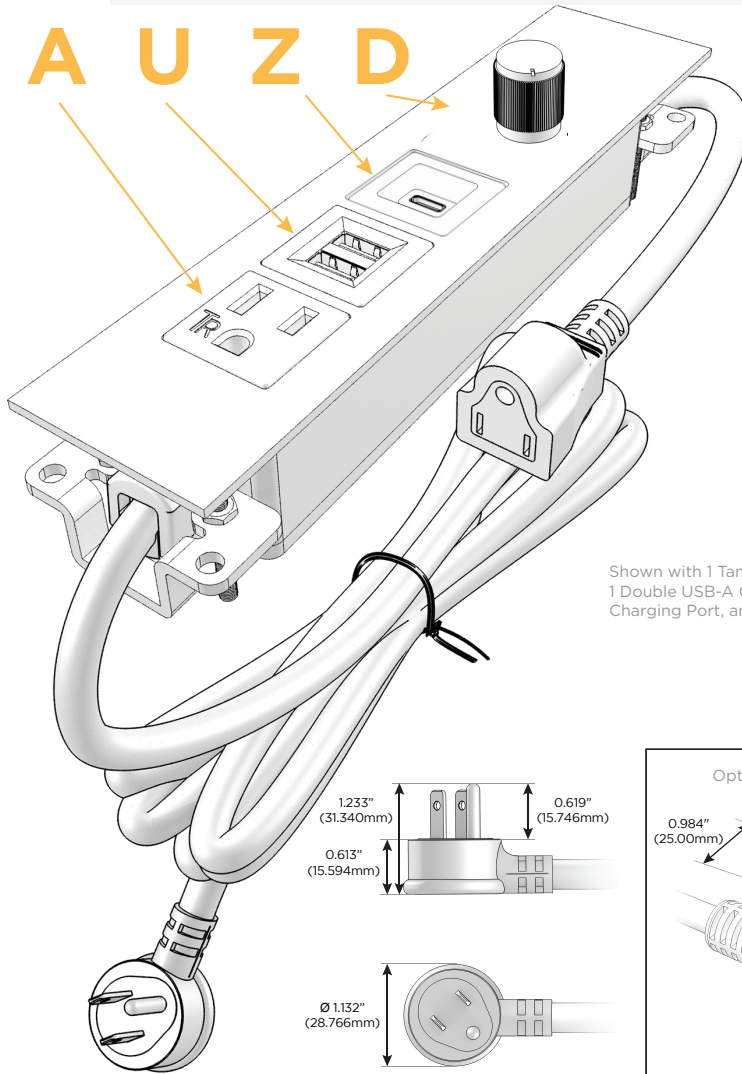5TM2-AUZD-M2STP

Distributed by
MORMAX

Mormax Company, Inc.
8 Westchester Plaza
Elmsford, NY 10523

914-699-0101
sales@mormax.com
mormax.com

Specs:

Modules/Ports:

A   Tamper Resistant AC Receptacle

U   Double USB-A (Fast Charging Ports - Rated for 3.2A)

Z   USB-C (18W High Speed Charging Port)

D   AC Dimmer

A U Z D

Shown with 1 Tamper Resistant AC, 1 Double USB-A Charging Port, 1 USB-C Charging Port, and 1 AC Dimmer.

1.233" (31.340mm)
0.619" (15.746mm)
0.613" (15.594mm)
Ø 1.132" (28.766mm)

Optional Straight 120 VAC Pass-through Plug

0.984" (25.00mm)
1.141" (29.00mm)
1.704" (43.300mm)
2.515" (63.900mm)

TOP

2.000" (50.800mm)
2.106" (53.503mm)
8.480" (215.403mm)
8.799" (223.503mm)

END

2.000" (50.800mm)
1.606" (40.800mm)
1.840" (46.744mm)
1.555" (39.503mm)

0.234" (5.944mm)
0.093" (2.381mm)
0.140" (3.563mm)
0.118" (3.000mm)

0.905" (23.000mm)

SIDE

ETL LISTED c us
Intertek
5005200